


# PDU Datasheet

Date : 2015-10-29

Number:

<b>Customer</b>		N/A	<b>RoHS</b>	Yes
<b>Product name</b>		Rack PDU	<b>Product No.</b>	99083301
<b>Model No.</b>		SQ33E1C3DA1	<b>Drawing No.</b>	N/A
<b>No.</b>	<b>Item</b>	<b>Basic description</b>		
1	Product Series	Monitor		
2	Receptacle Type	IEC 60320-C13 (Lockable)		
3	Outlets	33 Outlets- IEC 60320-C13 (Lockable)		
4	Input	IEC 60309 & Cable		
5	Installation	Vertical		
6	Input plug	IEC60309 IP44 16A/400VAC 3P+N+PE industrial connector		
7	Monitor module	LED current display ;Current overload alarm; Hot plug		
8	Protect module	N		
9	Housing color	Black		
10	Specifications of input cable	5*4mm <sup>2</sup> ZA RVV-3m long cable(black)		
11	Product dimension	Length x width x high =1900x55x61.5mm		
12	Mounting hole center distance	1875mm		
13	Housing length	1900mm		
14	Accessories	Female IEC 60309		
15	Product making	Product name	Rack PDU	
		Model	SQ33E1C3DA1	
		Rated voltage	380V three phase AC	
		Rated current	16A each phase	
		MAX current	16A each phase	
		MAX power		
		Safety	N	
		LOGO		
	Maker	SQ-ELECTRONICS		
<b>Design :</b>		<b>CustomerConfirmation:</b>	<b>Check :</b>	<b>Ratify :</b>

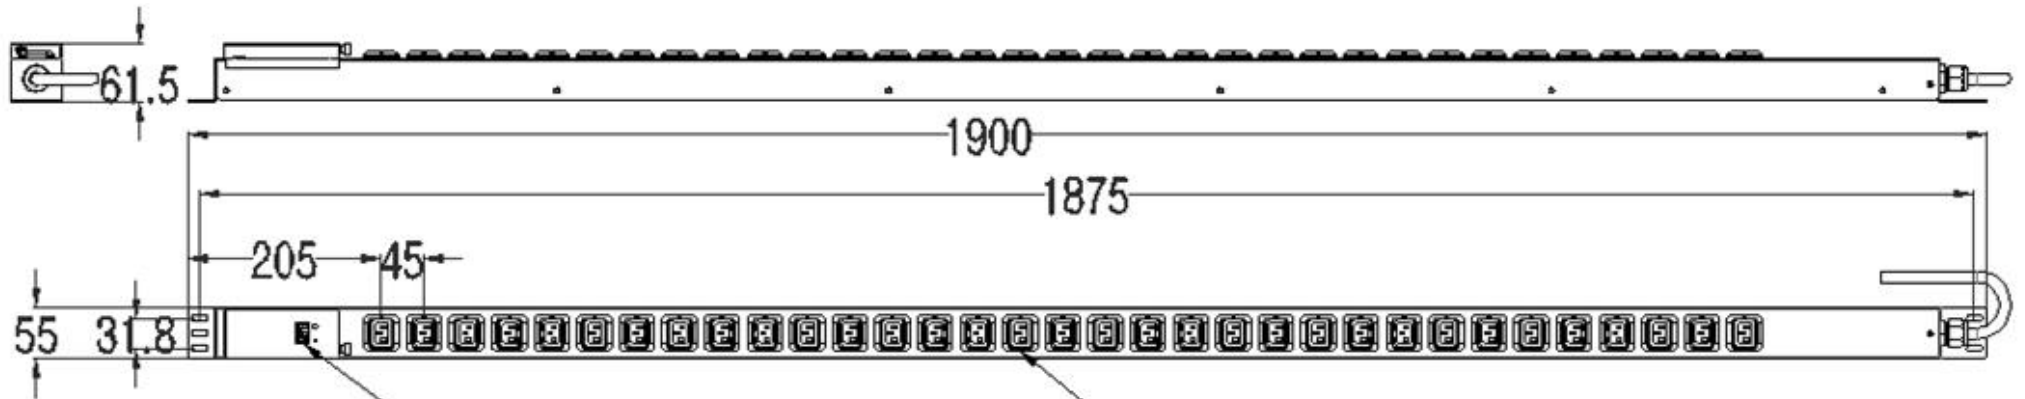

Digital current display

IEC 60320-C13 (Lockable)

